

Circular Duct Fan

TF



Description


The TF is an in-line centrifugal duct fan with high capacity and excellent reliability. The straight through radial fan is compact and very easy to install. It can cope with high pressure and long duct runs, whilst still operating at acceptable sound levels.

The TF range of fans have casings manufactured from galvanized steel and are moisture resistant. They are approved for installation in humid or damp environments being rated IP44 when installed in a duct system.

The fan speed can be controlled by voltage variation regulators. Several fans can be connected to the same controller providing the total rating of the controller is not exceeded.

The motors are an external rotor type motor. They have maintenance free sealed ball bearings and are protected from over heating by thermo contacts.


Dimensions

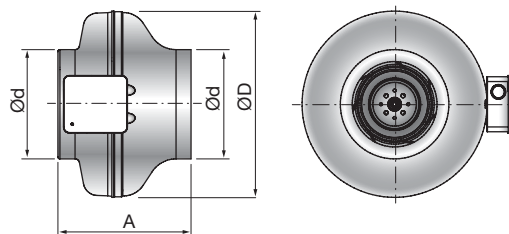

Product	Ød nom	ØD nom	A mm	m kg
TF100	100	243	188	2,60
TF100H	100	243	188	2,60
TF125	125	243	188	2,70
TF125H	125	243	188	2,70
TF150	150	271	191	3,00
TF150H	150	345	228	4,00
TF160	160	271	195	2,90
TF160H	160	345	226	4,00
TF200	200	345	228	4,20
TF200H	200	345	228	4,90
TF250H	250	345	228	4,90
TF315	315	402	257	5,90

All fans are 230 volt.

Ordering example


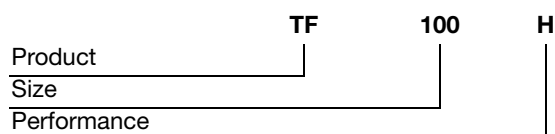


- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18

Circular Duct Fan

TF

Technical data

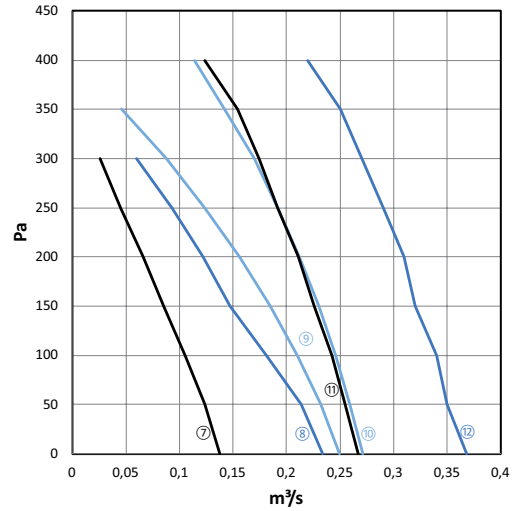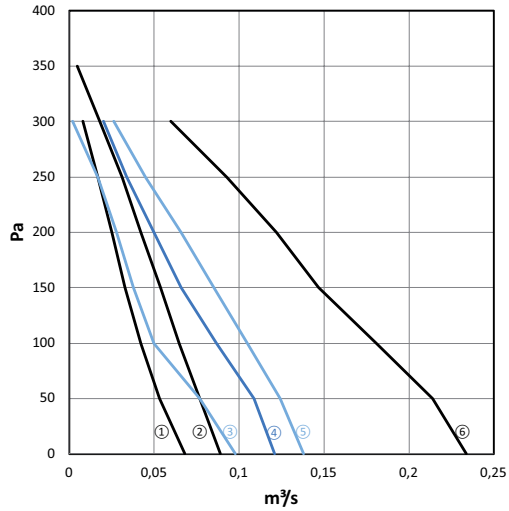

Graph Ref.	Product	m³/s @ Pa									Motor W	Amps FLC	Speed RPM
		0	50	100	150	200	250	300	350	400			
1	TF100	0,068	0,053	0,042	0,033	0,025	0,017	0,008			41	0,18	1730
2	TF100H	0,089	0,077	0,065	0,054	0,042	0,031	0,018	0,005		62	0,27	2530
3	TF125	0,098	0,077	0,05	0,038	0,028	0,017	0,002			40	0,18	1640
4	TF125H	0,121	0,109	0,087	0,066	0,05	0,034	0,02			62	0,27	2480
5	TF150	0,138	0,124	0,105	0,085	0,066	0,045	0,026			62	0,27	2540
6	TF150H	0,234	0,214	0,181	0,147	0,122	0,903	0,06			101	0,44	2480
7	TF160	0,138	0,124	0,105	0,085	0,066	0,045	0,026			62	0,27	2540
8	TF160H	0,234	0,214	0,181	0,147	0,122	0,093	0,06			101	0,44	2480
9	TF200	0,249	0,232	0,21	0,185	0,156	0,124	0,088	0,046		115	0,51	2580
10	TF200H	0,271	0,259	0,246	0,23	0,212	0,192	0,17	0,142	0,114	145	0,63	2750
11	TF250H	0,267	0,255	0,242	0,226	0,211	0,192	0,174	0,154	0,124	145	0,63	2750
12	TF315	0,368	0,35	0,34	0,32	0,31	0,29	0,27	0,25	0,22	224	0,97	2770

Circular Duct Fan

TF

Technical data

Graph Ref.	Product	Frequency	Sound Power Level								dB(A) @ 3m
			63	125	250	500	1K	2K	4K	8K	
1	TF100	Inlet	45	56	64	60	58	52	45	38	40
		Outlet	44	56	64	60	58	53	45	38	
		Breakout	34	21	37	37	42	39	41	34	
2	TF100H	Inlet	50	61	66	65	65	58	52	46	44
		Outlet	49	64	66	65	64	60	54	48	
		Breakout	33	24	40	40	45	42	44	38	
3	TF125	Inlet	45	53	65	62	59	53	47	39	40
		Outlet	44	52	65	61	57	53	48	40	
		Breakout	33	22	39	36	40	39	41	33	
4	TF125H	Inlet	52	56	68	67	65	59	55	48	44
		Outlet	46	58	63	66	63	60	56	49	
		Breakout	33	25	40	40	44	43	45	38	
5	TF150	Inlet	48	55	65	65	63	58	53	48	43
		Outlet	48	56	61	63	63	59	58	49	
		Breakout	33	24	39	40	45	44	44	32	
6	TF150H	Inlet	48	61	71	71	69	61	62	52	49
		Outlet	50	59	64	66	68	63	62	53	
		Breakout	33	34	42	49	53	47	48	35	
7	TF160	Inlet	48	55	65	65	63	58	53	48	43
		Outlet	48	56	61	63	63	59	58	49	
		Breakout	33	24	39	40	45	44	44	32	
8	TF160H	Inlet	48	61	71	71	69	61	62	52	49
		Outlet	50	59	64	66	68	63	62	53	
		Breakout	33	34	42	49	53	47	48	35	
9	TF200	Inlet	50	61	69	71	67	63	60	53	47
		Outlet	49	60	65	67	65	63	62	53	
		Breakout	32	31	41	46	49	47	46	33	
10	TF200H	Inlet	54	62	67	69	66	63	62	56	45
		Outlet	57	60	68	69	67	65	64	58	
		Breakout	25	33	40	45	47	43	43	34	
11	TF250H	Inlet	53	60	64	65	67	63	63	61	48
		Outlet	55	60	70	65	67	65	63	60	
		Breakout	25	30	34	48	52	47	44	38	
12	TF315H	Inlet	55	60	64	64	64	68	69	64	48
		Outlet	57	60	71	65	66	69	69	62	
		Breakout	25	44	48	46	46	47	46	36	

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18